

## Test Leads

AL-27



- Wire : PVC UL 1803 / 18AWG  
length : 1100±30mm  
Out diameter : 3.50mm  
Temperature tolerance range : -40°C~105°C  
Braid copper wires : 64 / 0.12mm
- Terminal :  
Right angle 4mm brass (nickel plated) banana plug.
- Rating :  
CAT III 1000V 10A / CAT IV 600V 10A

AL-29, AL-29L




CE



- Wire : PVC UL 1803 / 18AWG  
Length : 1100±30mm  
Out diameter : 4mm  
Temperature tolerance range : -40°C~105°C  
Braid copper wires : 64 / 0.12mm
- Terminal :  
AL-29 : Straight input plug  
AL-29L : Right angle input plug
- Rating :  
EN 61010-031:2002 + A1:2008  
CAT IV 600V / CAT III 1000V 10A

จัดจำหน่ายโดย : บริษัท เอฟเวอร์เทค จำกัด  
TEL : (02)8702884-5, (02)4289793-5  
Email: sales@evertech.co.th  
www.evertech.co.th


AL-30,AL-30F

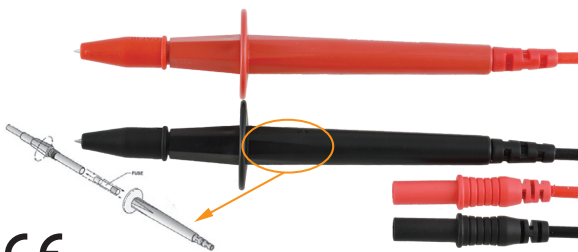

CE

- The spring-shrouded 4mm brass caged banana probe tip.
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-31:2002 + A1:2008  
CAT III 1000V 10A  
**AL-30R Red, AL-30B Black, AL-30G Green**
- **AL-30F** It is the fused version for **AL-30**.  
Fuse size : 6x32mm  
Rating : EN 61010-031:2002 + A1:2008  
CAT III 250V 10A / 500V 10A / 690V 2A  
**AL-30FR Red, AL-30FB Black**

AL-30A

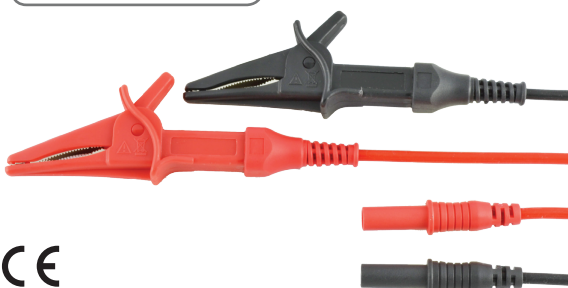

CE

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-031:2002 + A1:2008 CAT III 1000V 10A  
**AL-30AR Red**  
**AL-30AB Black**  
**AL-30AG Green**  
**AL-30AL: 90° angle 4mm banana plug.**