


Test Leads


AL-32,AL-32F

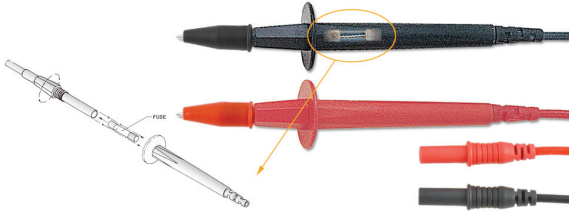

CE

- 2mm probe tip
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-31:2002 + A1:2008
CAT III 1000V 10A
- **AL-32R Red, AL-32B Black**
- **AL-32F** It is the fused version for **AL-32**.
Fuse size : 6x32mm
- Rating : EN 61010-031:2002 + A1:2008
CAT III 250V 10A / 500V 10A / 690V 2A
- **AL-32FR Red, AL-32FB Black**

AL-33

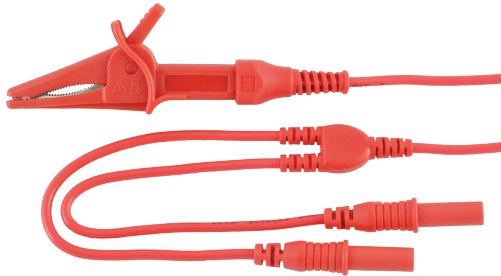

CE

- Simplified measurement probe for earth resistance tester use.
- Wide grip alligator clips with integral finger guard and large 35mm high tension spring mouth.
- PVC-insulated wire 1m with branched straight input plugs.
- Rating : EN 61010-31:2002 + A1:2008 CAT III 600V 10A


AL-34B



CE

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- PVC-insulated wire 60cm (0.127 / 65).
- Right angle connectors.
- Rating : EN 61010-031:2002 + A1:2008 CAT III 600V 10A


AL-35,AL-35F

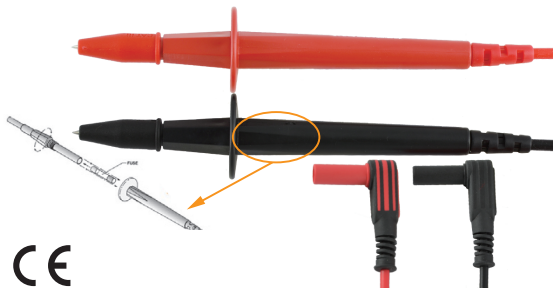

CE

- The spring-shrouded 4mm brass caged banana probe tip.
- Double insulated silicone wire 1m.
- Shrouded right angle connector.
- Rating : EN 61010-031:2002 + A1:2008 CAT III 1000V 10A
- **AL-35R Red, AL-35B Black**
- **AL-35F** It is the fused version for **AL-35**.
Fuse size : 6x32mm
- Rating : EN 61010-031:2002 + A1:2008
CAT III 250V 10A / 500V 10A / 690V 2A
- **AL-35FR Red, AL-35FB Black**

AL-36

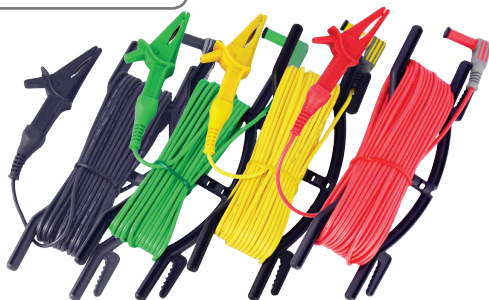

CE

- Wide grip alligator clips with integral finger guard and large 35mm high tension spring mouth.
- PVC-insulated wire (Red-15m, Yellow-10m, Black-10m, Green-5m)
- Right angle connector.
- Rating : EN 61010-031:2002 + A1:2008 CAT III 600V 2A
- **AL-36R SPL Red AL-36Y SPL Yellow**
AL-36G SPL Green AL-36B SPL Black
- For 3-wire / 4-wire earth resistance tester use