



AL-39H

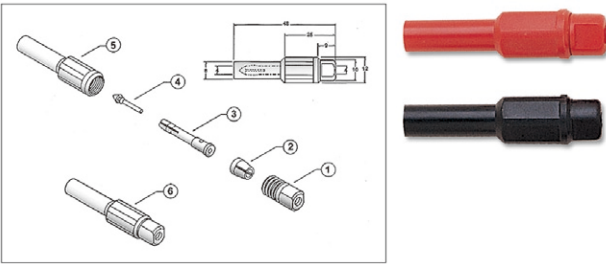

- Stacking shrouded plug.
- AL-39HR Red**
AL-39HB Black

AL-50

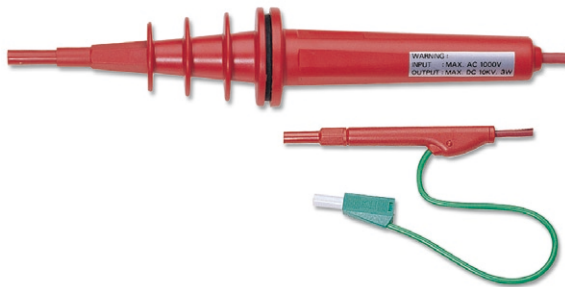

- Large test probe handle with shrouded 4mm brass caged banana plug tip.
- super insulated silicone wire 2.7m.
- safety straight input plug connect with extra green guard.
- color : Red


WARNING :

INPUT : MAX. AC 1000V


OUTPUT : MAX. DC 10KV. 3W

ONLY AVAILABLE FOR INSULATION TESTER.


AL-51

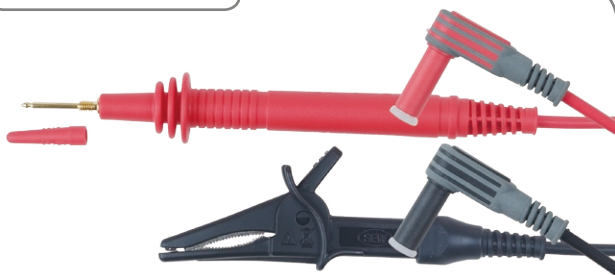

- **Terminal** : 4mm banana plug
- **Wire** : PVC UL1803
Temperature tolerance range $-40^{\circ}\sim 105^{\circ}\text{C}$
Out dimension : 4mm
Braid copper wires (180 of 0.12mm)
Length : $1100\pm 30\text{mm}$
- EN 61010-031 CAT IV 1000V 15A



AL-55

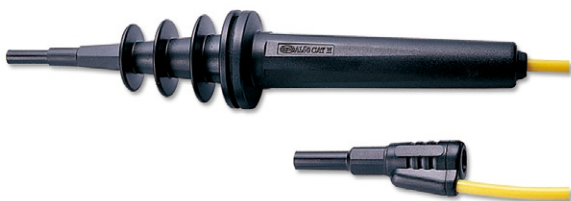

DISCHARGE ROD

- Large test probe handle with shrouded 4mm brass caged banana plug tip.
- Super insulated silicone wire 1.5m, safety straight input plug.
- color : black

TEL-AL11-6A



- **Terminal** : 4mm banana plug
- **Wire** : PVC UL1803
Length : $1100\pm 30\text{mm}$
Braid copper wires(200 of 0.08mm)
Temperature tolerance range : $-40^{\circ}\sim 105^{\circ}\text{C}$
Color : Red and Black each(set)
- EN 61010-031 CAT IV 1000V 10A

