
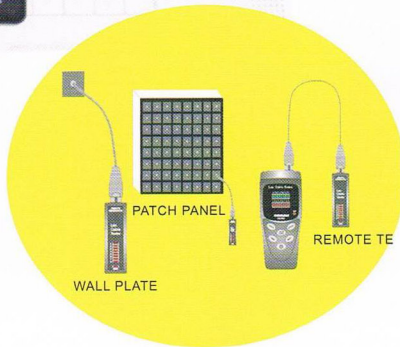


LC-90



### DISPLAY :

Phase rotation indication by both audio and LED indicator, checking if currents of three different ratings are in proper phase. Phase open-circuit detection by indicator.

### FEATURES :

Test pin configuration for 10/100 base-T cable, 10 base-2 cable, RJ45/RJ 11 modular cables, AT & T 258 A cable, EIA/TIA 568 A/568B cables and Token Ring Cable etc. Verify cable continuity, open, short and miss-wired. Auto and manual scan function. Ground wire test. Locked status wire function. Buzzer sound warning for defective wire detected.


 จัดจำหน่ายโดย : บริษัท เอฟเวอร์เทค จำกัด  
 TEL : (02)8702884-5, (02)4289793-5  
 Email: sales@evertch.co.th  
 www.evertch.co.th

### SPECIFICATIONS

Model	LC-90
Specification Display	LED
Connectors	RJ-45 (8P8C) input/output
Power	9V 006P battery
CABLE TYPES	<ul style="list-style-type: none"> <li>• Unshielded Twisted Pair (UTP 100, Cat 3, 4 &amp; 5).</li> <li>• Foil-screened Twisted pair (FTP 100 and 120, Cat 3, 4 &amp; 5).</li> <li>• Shielded Twisted Pair (STP 150 IBM Type 1 &amp; 6).</li> </ul>
Remote Terminators	Sequence number #1
Function keys	ON-OFF, TEST, AITO, LOCK, MAMU, BATT
DIMENSION	Size: 130X56X38mm (LXWXH) 72X23X24mm (LXWXH) Weight : About 250g
RECOGNIZE WIRING SCHEMES	EIA/TIA-568A/B, USOC, 10(100) Base/HUB, BNC/10 Base-2, 10(100) Base-T, Token ring.
ACCESSORIES	<ul style="list-style-type: none"> <li>• User's manual.</li> <li>• Carrying case X1pc.</li> <li>• 9V battery X1pc.</li> <li>• One patch cable (RJ-45 to RJ-45)</li> </ul>