

PINTEK

AC/DC Current Probe

★ **Low Noise!**

PA-622


- Max. $\pm 100A$ DCA
- Resolution: $\geq 10mA$
- Bandwidth: DC ~ 100KHz
- Rise Time: 3.5us
- Over Range Function
- 10mV/A, 100mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable



PA-655

- Max. $\pm 50A$ DCA
- Resolution: $\geq 5mA$
- Bandwidth: DC ~ 500KHz
- Rise Time: 0.7us
- Over Range Function
- 20mV/A, 200mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable


จัดจำหน่ายโดย : บริษัท เฟเวอร์เทค จำกัด
TEL : (02)8702884-5, (02)4289793-5
Email: sales@evertech.co.th
Evertech Electronics Co., Ltd
www.evertech.co.th

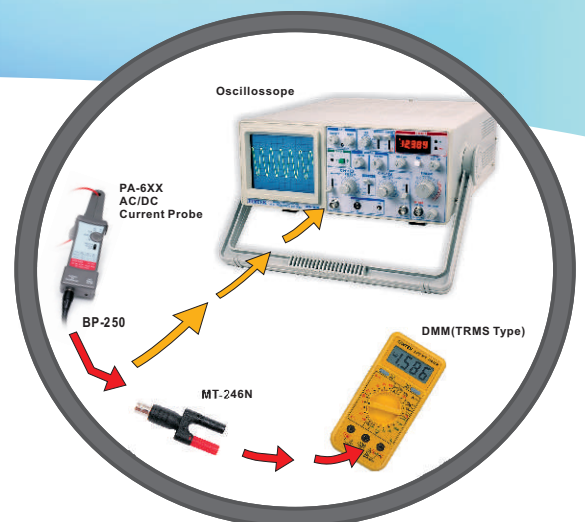

PA-655/PA-622 AC/DC Current Probe



SPECIFICATIONS:

| FUNCTION/MODEL | PA-622 |
|-----------------------|---|
| DC Accuracy Typical | ±3%: 50mA~10A peak at 100mV/A ±4%: 500mA~40A peak at 10mV/A ±15%: 40A~100A peak |
| Max. Working Voltage | 300V CAT III |
| Max. Floating Voltage | 600V CAT II |
| Frequency Range | DC-100KHz(-3dB) |
| Rise Time | 3.5 us |
| Battery or Adaptor | 9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor |
| Accessories | BP-250, MT-246N, Adaptor, Instruction Manual. |

ACCESSORIES:



PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan
 Tel: 886-2-86859562~3 ; 886-2-86861898
 Fax: 886-2-86852081 ; 886-2-86861114
<http://www.pintek.com.tw>
 E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

CE

SALES AGENT



จัดจำหน่ายโดย : บริษัท เอฟเวอร์เทค จำกัด
 TEL : (02)8702884-5, (02)4289793-5
 Email: sales@evertech.co.th
www.evertech.co.th