

# PROVA®



จัดจำหน่ายโดย : บริษัท เอมเพอร์เทค จำกัด  
TEL : (02)8702884-5, (02)4289793-5  
Email: sales@evertech.co.th  
www.evertech.co.th

## Model 21/23 Power Harmonics and Leakage Tester


## Model 19 Leakage and Harmonics Tester

Model 19, 21, 23

- True RMS value (V and A)
- Leakage Current Measurement at 10 $\mu$ A Resolution
- Harmonic Analysis (V and A) to the 99<sup>th</sup> Order
- Better Understanding of High Frequency Harmonic Analysis (up to 5/6 KHz)
- Non-interrupted Harmonic Analysis
- Analysis of Total Harmonic Distortion (THD-F)
- Analysis of Crest Factor (C.F.)
- Fast Peak Function (33 $\mu$ s and 39 $\mu$ s)
- Programmable CT Ratio (1 to 250)

Model 21(50A) and 23(100A)

- W, KW, H.P.
- VA, KVA, VAR, KVAR
- PF, Phase Angle ( $\Phi$ )
- Energy (mWH, WH, KWH)
- Analysis of Standby Power Consumption
- Balanced 3 $\Phi$  Power Quality
- Balanced 3 $\Phi$  Sequence

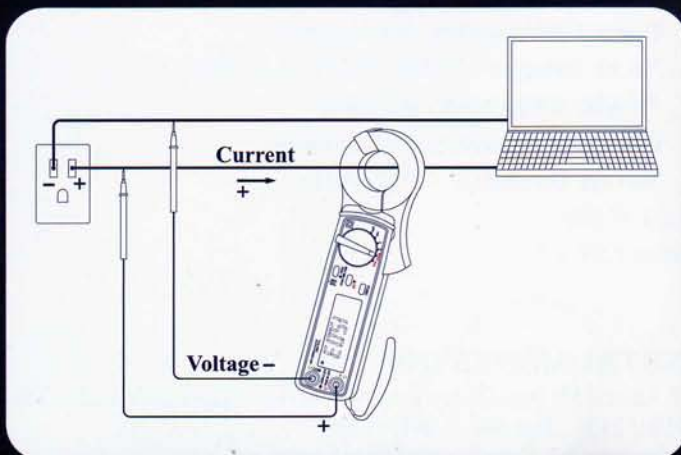

EN61010-2-032  
CAT. II 600V  
CAT. III 300V  
Pollution Degree 2



**Specifications (23°C ± 5°C)**

Please refer to users manual for more detailed and up-to-date description of specification.

**AC Watt (50 or 60 Hz, PF 0.5 to 1, CT = 1, Accuracy of Readings) Model 21 (0 to 50A), Model 23 (0 to 100A)**

Range	Resolution	Accuracy 21 (0 - 30A) Accuracy 23 (0 - 60A)	Accuracy 21 (30 - 50A) Accuracy 23 (60 - 100A)
0.000 - 9.999 W	0.001W	±1% ± 0.02W	±2% of VA ± 5dpts
10.00 - 99.99 W	0.01W	±1% ± 0.2W	±2% of VA ± 5dpts
100.0 - 999.9 W	0.1W	±1% ± 0.2W	±2% of VA ± 5dpts
1.000 - 9.999 KW	0.001 KW	±1% ± 0.02KW	±2% of VA ± 5dpts
10.00 - 99.99 KW	0.01 KW	±1% ± 0.2KW	±2% of VA ± 5dpts
100.0 - 999.9 KW	0.1 KW	±1% ± 0.2KW	±2% of VA ± 5dpts
1000 - 9999 KW	1 KW	±1% ± 2KW	±2% of VA ± 5dpts

**AC Current (50 or 60 Hz, True RMS)**

Range (Model 19, 21)	Range (Model 23)	Resolution	Accuracy of Readings
0.30 - 60.00mA	0.30 - 60.00mA	0.01mA	±0.5% ± 5dpts
60.0 - 600.0mA	60.0 - 600.0mA	0.1mA	±0.5% ± 5dpts
0.030 - 3.000A	0.030 - 9.999A	0.001A	±0.5% ± 5dpts
3.00 - 30.00A	10.00 - 60.00A	0.01A	±0.5% ± 5dpts
30.00 - 50.00A	60.00 - 99.99A	0.01A	±1.0% ± 5dpts

**AC Voltage (50 or 60 Hz, True RMS)**

Range	Resolution	Accuracy of R.	Range	Resolution	Accuracy of R.
3V - 250V	0.1 V	±0.5% ± 5dpts	250V - 600V	0.1 V	±0.5% ± 5dpts

**Harmonics of AC Voltage in % and Magnitude (1 to 99th order)**

Range	Resolution	Accuracy in %	Resolution	Accuracy in Magnitude
50V - 600V	0.1 %	±0.5%	0.1 V	±0.5% ± 0.5V

**Harmonics of ACA in % Percentage and Magnitude (1 to 99th order)**

Range (Model 19, 21)	Range (Model 23)	Res.	Accuracy (%)	Res.	Accuracy of R.
10.00 - 60.00mA	10.00 - 60.00mA	0.1 %	±0.5%	0.01mA	±0.5% ± 0.1mA
60.0 - 600.0mA	60.0 - 600.0mA	0.1 %	±0.5%	0.1mA	±0.5% ± 1mA
0.5 - 3.000 A	0.5 - 9.999 A	0.1 %	±0.5%	0.001 A	±0.5% ± 0.01 A
3.00 - 30.00 A	10.00 - 60.00 A	0.1 %	±0.5%	0.01 A	±0.5% ± 0.1 A
30.00 - 60.00 A	60.00 - 99.99 A	0.1 %	±1.0%	0.01 A	±1.0% ± 0.1 A

**Power Factor (PF) (Model 21 and 23)**

Range (PF)	Resolution	Accuracy
0.000 - 1.000	0.001	±1°

**Phase Angle (Φ) (Model 21 and 23)**

Range (Φ)	Resolution	Accuracy
-180° to 180° (0 to 360°)	0.1°	±1°


**Total Harmonic Distortion (THD-F, 1 to 99th order)**

Range	Resolution	Accuracy of R.
0.0 - 999.9 %	0.1%	±0.5% ± 5 digits

**Crest Factor (C.F., Accuracy of Readings)**

Range	Resolution	Accuracy of R.
1.00 - 99.99	0.01	±5% ± 30 digits

**Conductor Size:** 30mm (approx.)**Display:** 4+2+2 digits LCD**Auto-Power-Off:** 30 minutes**LCD update rate:** 2 times / sec.**Operating Temperature:** -10°C to 50°C**Storage Temperature:** -20°C to 60°C**Dimension:** 210 (L) x 62 (W) x 35.6mm (H), 8.3" (L) x 2.5" (W) x 1.4" (H)**Accessories:** test leads, Carrying bag x 1, Users manual x 1, Batteries 1.5V x 2**Option:** alligator clips**Battery Type:** 1.5V SUM-3 x 2**Power Consumption:** 5mA (approx.)**No. of Samples / Period:** 512 (V & A), 256 (W)**Weight:** 200g (battery included)**Operating Humidity:** < 85% relative**Storage Humidity:** < 75% relative


 จัดจำหน่ายโดย : บริษัท เอฟเวอร์เทค จำกัด  
 TEL : (02)8702884-5, (02)4289793-5  
 Email: sales@evertch.co.th  
[www.evertch.co.th](http://www.evertch.co.th)

**PROVA**®**PROVA INSTRUMENTS INC.**

6F-2, No. 129, Lane 235, Pao-Chiao Rd., Shin-Tien, Taipei Hsien 231, Taiwan

Tel: 886-2-8919-1255 Fax: 886-2-8919-1489

http://www.prova.com.tw E-mail: prova@ms3.hinet.net