


Data Sheet

SDG5000 Series Function/Arbitrary Waveform Generator

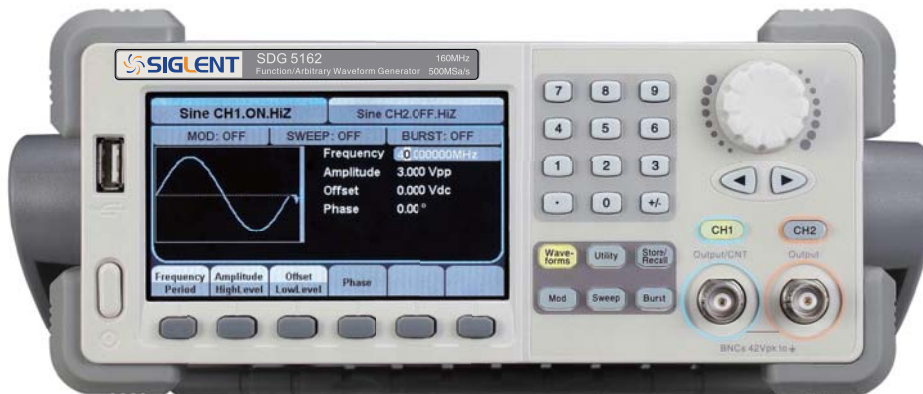

Main features

- ◆ DDS technology, dual-channel output, 500MSa/s sample rate, 14bit vertical resolution;
- ◆ The 2ppm high-frequency stability, -116dBc/Hz low phase noise(SSB) signal output;
- ◆ Has the outstanding signal fidelity,512k waveform length,can output complicated signals,can display signals user define more accurately;
- ◆ Adopt unipue EasyPulse technology,can output the pulse signal which is low jitter and very small duty cycle,the edge and pulse width can adjust a wide rang and fine;
- ◆ Complete set of modulation functions: AM, DSB-AM,FM, PM, FSK, ASK, PWM, linear/logarithmic sweep and burst;
- ◆ Built-in accurate frequency counter enables to measure ranges 100mHz-200MHz (single channel);
- ◆ Standard interfaces: USB Device, USB Host, Optional interface: GPIB and LAN interface;
- ◆ The TFT graphics of big screen,higher-resolution and high brightness,support the intuitionistic operations and setting parameters;
- ◆ Supplied with powerful arbitrary editing software, remote control support.

Signal fidelity

SDG5000 series Function/Arbitrary Waveform Generator has high stability time base and 512 kpts arbitrary waveforms storage length, can output more complicated and more accurate arbitrary, User can get more fidelity signal by the Function/Arbitrary Waveform Generator.

Edit arbitrary waveform

Enables edition of 14-bit 512kpts arbitrary output waveforms, Arbitrary editing software EasyWave provides 9 standard waveforms: Sine, Square, Ramp, Pulse, ExRise, ExpFall, Sinc, Noise and DC, which meets all engineers' basic needs; In addition, it provides plenty of ways of manual drawing, point-to-point line drawing and arbitrary point drawing. It facilitates to create complex waveforms; Multi-file screen management helps users to edit multiple-waveform simultaneously. It provides 10 Storage in non-volatile RAM. You can edit and store more waveforms by EasyWave.

outstanding performance

SDG5000 series Function/Arbitrary Waveform Generator is a new family member of SIGLENT with friendly design: 4.3 inch TFT-LCD display; Built-in Chinese/English language; Online help function; Support USB and internal storage, facilitate files management; Special connection terminal for grounding.

Specification

Model	SDG5162	SDG5122	SDG5082
Max. output frequency	160MHz	120MHz	80MHz
Output channels	2		
Sample rate	500 MSa/s		
Arbitrary waveform length	CH1:16 kpts CH2:512 kpts		
Frequency resolution	1 μ Hz		
vertical resolution	14 bit		
Waveform	Sine, Square, Ramp, Pulse, Gaussian Noise, DC, Built-in arbitrary waveforms		
Modulation	AM、DSB-AM、FM、PM、FSK、ASK、PWM、Sweep、Burst		
Frequency counter	Frequency range:100mHz~200MHz		
Standard interface	USB Host & Device		
Optional interfaces	GPIB(IEEE-488), LAN		
Dimension	Width×Height×Depth=261mm×105mm×344mm		

Attention

All these specifications apply to the SDG5000 Series Function/Arbitrary Waveform Generator unless otherwise explanation. To satisfy these specifications, the following conditions must be met first:

- 1.The instrument has been operating continuously for more than 30 minutes within specified operating temperature range (18°C~28°C).
- 2.The temperature variation does not exceed 5°C .
- 3.Unless otherwise stated,all specifications apply with a 50Ω resistive load and auto range ON.

Note: all specifications are guaranteed unless where noted ‘typical’.

Typical:The characteristic performance,which 80% or more of manufactured instruments will meet,This data is not warranted,does not include measurement uncertainty,and is valid only at room temperature (approximately 23°C)

Frequency Specification

Model	SDG5162	SDG5122	SDG5082
Waveform	Sine, Square, Ramp, Triangle, Pulse, Noise, Arb		
Sine	1μHz ~ 160MHz	1μHz ~ 120MHz	1μHz ~ 80MHz
Square	1μHz ~ 50MHz	1μHz ~ 40MHz	1μHz ~ 30MHz
Pulse	1μHz ~ 40MHz	1μHz ~ 30MHz	1μHz ~ 20MHz
Ramp/Triangular	1μHz ~ 4MHz	1μHz ~ 3MHz	1μHz ~ 2MHz
Gaussianwhite noise	100MHz (-3dB)	100MHz (-3dB)	100MHz (-3dB)
Arbitrary	1μHz ~ 40MHz	1μHz ~ 30MHz	1μHz ~ 20MHz
Resolution	1 μHz		
Temperature coefficient	1 year, 0°C ~ 55°C, ±2 ppm		

Sine Spectrum Purity

Harmonic Distortion	DC-1 MHz	<-54 dBc
	1 MHz - 10 MHz	<-46dBc
	10 MHz - 100 MHz	<-36dBc
	100 MHz - 160 MHz	<-30 dBc
Totalharmonic waveform distortion	DC~20kHz, 1Vpp<0.2%	
Spurious signal (non-harmonic)	DC~1MHz<-70dBc	
	1MHz~10MHz<-70dBc+6dB/spectrum phase	
Phase noise	100kHz Offset,-116dBc/Hz(typical value)	

Square Specification

Rise/fall time(10% ~ 90%)过冲		< 8ns
Overshoot		< 3% (typical, 1kHz, 1Vpp)
Duty Cycle	1 μ Hz ~ 10 MHz	20% ~ 80%
	10 MHz(exclude)~ 40MHz	40% ~ 60%
	40 MHz(exclude)~ 50MHz	50%
Asymmetric(50% Duty Cycle)		1% of period+5ns(typical, 1kHz, 1Vpp)
Jitter(cycle-to-cycle)		100ps(typical,rms)

Ramp/Triangle Specification

Linearity	<0.1% of Peak valu output (typical, 1kHz, 1Vpp, 100% symmetric)
Symmetry	0%~100%

Pulse Specification

Periods	1000000s,Max. 25ns, Min.
Pulse width	\geq 12ns
duty	0.0001% to 99.9999%
Rise/Fall time (10% ~ 90%)	6ns~6s, 100ps resolution
Overshoot	< 3%
Jitter(cycle to cycle)	<100ps(typical,rms)

Arbitrary Specification

Output	CH1	CH2
Waveform length	16k points	512k points
Vertical resolution	14 bit	14 bit
Sample rate	500 MSa/s	500 MSa/s
Min. Rise/Fall time	10ns(typical)	10 ns(typical)
Jitter(cycle to cycle)	2 ns(max)	2 ns(max)

Output Specification

Output	CH1	CH2
Amplitude (into 50Ω)	1 mVpp ~ 10 Vpp (≤40MHz)	1 mVpp ~ 10 Vpp (≤40MHz)
	1 mVpp ~ 5 Vpp (40MHz~100MHz)	1 mVpp ~ 5 Vpp (40MHz~100MHz)
	1 mVpp ~ 2.5Vpp (100MHz~130MHz)	1 mVpp ~ 2.5Vpp (100MHz~130MHz)
	1 mVpp ~ 1.5Vpp (130MHz~160MHz)	1 mVpp ~ 1.5Vpp (130MHz~160MHz)
Vertical accuracy (100 kHz sine)	±(1%+1mVpp of setting value)	±(1%+1mVpp of setting value)
Amplitude flatness(compare to100 kHz sine,1Vpp)	≤10MHz ±0.1 dB	≤10MHz ±0.1 dB
	≤60MHz ±0.2 dB	≤60MHz ±0.2 dB
	≤100MHz ±0.4 dB	≤100MHz ±0.4 dB
	≤160MHz ±0.8 dB	≤160MHz ±0.8 dB
Cross talk	<-80dB	
Channel Delay	<1ns	

DC Offset Specification

Output	CH1	CH2
Range(DC)	±5V(50Ω)	±5V(50Ω)
	±10V(high impedance)	±10V(high impedance)
Offset accuracy	±(setting offset value *1%+1mV)	±(setting offset value *1%+1mV)

Waveform Output

Impedance	50Ω(typical)	50Ω(typical)
Protection	short-circuit protection	short-circuit protection
Isolation	Connector shells for channel output(s), Sync, and Mod In are connected together but isolated from	
	the instrument's chassis, Maximum allowable voltage on isolated connector shells is ±42Vpk.	

AM / DSB-AM Modulation (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Source	Internal/External
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary
Modulation depth	0%~120%
Modulation Frequency	1mHz~50kHz

FM Modulation (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Source	Internal/External
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary
Modulation Frequency	1mHz~50kHz

PM Modulation (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Source	Internal/External
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary
Phase Deviation	0~360° ,0.1°Resolution
Modulation Frequency	1mHz~50kHz

FSK Modulation (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Source	Internal/External
Modulation waveform	50% duty-cycle square waveform
Modulation Frequency	1mHz~1MHz

ASK Modulation (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Source	Internal/External
Modulation waveform	50% duty-cycle square waveform
Modulation Frequency	1mHz~1MHz

PWM Modulation (CH1/CH2)

Carrier	Pulse
Source	Internal/External
Modulation waveform	Sine, Square, Ramp, Arbitrary(except DC)
Modulation Frequency	1mHz~50kHz

Sweep (CH1/CH2)

Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Type	linear/logarithmic
Direct	Up/down
Sweep time	1 ms ~ 500 s ± 0.1%
Trigger source	Manual, external, internal

Burst (CH1/CH2)

Waveform	Sine, Square, Ramp, Pulse, Arbitrary(except DC)
Carrier Frequency	2mHz~100MHz
Type	Count(1 ~ 1,000,000 periods),infinite, Gated
Start/Stop phrase	0° ~360°
Internal period	1 μs ~ 1000 s ± 1%
Trigger delay	232ns~34s
Gated source	External trigger
Trigger source	Manual, External or Internal

External modulation



จัดจำหน่ายโดย : บริษัท เอฟเวอร์เทค จำกัด
 TEL : (02)8702884-5, (02)4289793-5
 Email: sales@evertech.co.th
 www.evertech.co.th

Connector	Rear-panel BNC,isolated from chassis
Voltage level	±4.5Vpk= 100% modulation >5kΩ input impedance
Note: The external input voltage can't be over ±5Vpk, otherwise instrument gets damaged.	

Trigger Input

Connector	Rear-panel BNC, chassis-referenced
Input Level	TTL compatible
Slope	Up or down (optional)
Pulse width	> 50 ns
Input impedance	>5kΩ, DC coupling
Reaction time	380ns(typical)

Trigger Output

Connector	Rear-panel BNC, chassis-referenced
Voltage level	TTL compatible
Pulse width	> 60 ns(typical)
Output impedance	50Ω(typical)
Max Frequency	1 MHz

SYNC Output

Connector	Rear-panel BNC, isolated from chassis
Voltage level	TTL compatible
Pulse width	> 50 ns(typical)
Output impedance	50Ω(typical)
Max Frequency	2 MHz

Frequency reference input

Connector	Rear-panel BNC, isolated from chassis and all connector.
Frequency range	10MHz±50Hz
Voltage level	2.3Vpp ~3.3Vpp
Lock time	< 2 s
Input impedance	1KΩ AC-coupled

Frequency reference output

Connector	Rear-panel BNC, chassis-referenced
Frequency	10MHz
Voltage level	>1Vpp
Output impedance	50Ω AC-coupled

Frequency Counter

Measurement	Frequency, Period, Positive/negative pulse width, duty cycle	
Frequency range	Single Channel: 100mHz~200MHz	
Frequency resolution	6bit/s	
Voltage range (non-modulated signal)		
DC coupling	DC offset range	±1.5VDC
	100mHz~100MHz	50mVrms~±2.5V
	100MHz~200MHz	100mVrms~±2.5V
AC coupling	1Hz~200MHz	100mVrms~5Vpp
Pulse width and duty-cycle measurement	1Hz~10MHz(50mVrms~5Vpp)	
Input adjustment	Input impedance	1MΩ
	Coupling mode	AC,DC
	High-frequency rejection	ON/OFF
Trigger level range	-3V~ 1.8V	

General Specification

Display	
Display type	4.3inch'TFT-LCD
Resolution	480(RGB)×272
Color depth	24bit
Contrast Ratio	500:1(typical)
Luminance	300cd/m2(typical)
Power	
Voltage	100~240 VACRMS, 45~66Hz,CATII
	100~127 VACRMS, 45~440Hz,CATII
Consumption	<30W
Fuse	1.25A,250V

Environment	
Temperature	Operation:0°C~40°C
	Storage:-20°C~60°C
Humidity range	Below +35 °C :≤90% relative humidity
	+35 °C ~+40 °C :≤60% relative humidity
Altitude	Operation: below 3,000 meters
	Storage: below 15,000 meters
Others	
Dimension	Width:261mm
	Height:105mm
	Depth:344mm
Weight	N.W: G.W:
IP protection	
IP2X	
Calibration Cycle	
1year	

Purchase Information

Product Name	SIGLENT SDG5000 Function/Arbitrary Waveform Generator
Models	SDG5162 160MHz
	SDG5122 120MHz
	SDG5082 80MHZ
Standard Accessories	A User Manual
	A Certification
	A Guaranty Card
	An CD(including EasyWave2.0 computer software system)
	A Power Cord that fits the standard of destination country
Optional Accessories	A USB Cable
	BNC cable, GPIB-USB Adapter

SHENZHEN SIGLENT TECHNOLOGIES CO., LTD

Address: 3/f, no.4 buliding, 3rd liuxian rd, antongda industry garden

Email: sales@siglent.com

Tel: +86-755-36615186



จัดจำหน่ายโดย : บริษัท เฟเวอร์เทค จำกัด
 ๓ ชั้น, ถนน ลีเซียน, ๕18101, จีน.

TEL : (02)8702884-5, (02)4289793-5

Email: sales@evertech.co.th Fax: +86-755-33591582

www.evertech.co.th