

PERFECTION FOR THE SUN



จัดจำหน่ายโดย : บริษัท เฟเวอร์เทค จำกัด
 TEL : (02)8702884-5, (02)4289793-5
 Email: sales@evertech.co.th
 www.evertech.co.th

New HT solutions for performance optimization and troubleshooting.

Thanks to the decrease in the cost of components and the remarkable increase of performance, installing photovoltaic systems on the roof or on the ground has become increasingly common. In a photovoltaic system, problems connected to safety and to the system's performance must be checked, and maintenance of strings and single panels must be carried out.




PHOTOVOLTAIC TESTERS

Troubleshooting


- It may happen that, during the operation of a system, **some modules may jeopardize the performance** of the whole system. When system efficiency is lower than expected, it is necessary **to detect the defective modules** so that they can be replaced. This can be achieved **by measuring the I-V curve** with devices **SOLAR I-Vw** and **I-V400w**.

Commissioning Tests

- When **operating** a photovoltaic system, it is necessary to **certify its safety according to IEC62446**. The suitable device to carry out these verifications is **PVCHECKS**.

Performance

- Performance **Recording** is one of the **necessary requirements** to make **maintenance programs efficient**. By monitoring system performance it is possible to **certify a production loss** quickly and efficiently. **SOLAR300N**, **SOLAR I-Vw** and **MPP300** are the **ideal solution** for **recording over time the energy production of a system** and the **performance check of an inverter**.

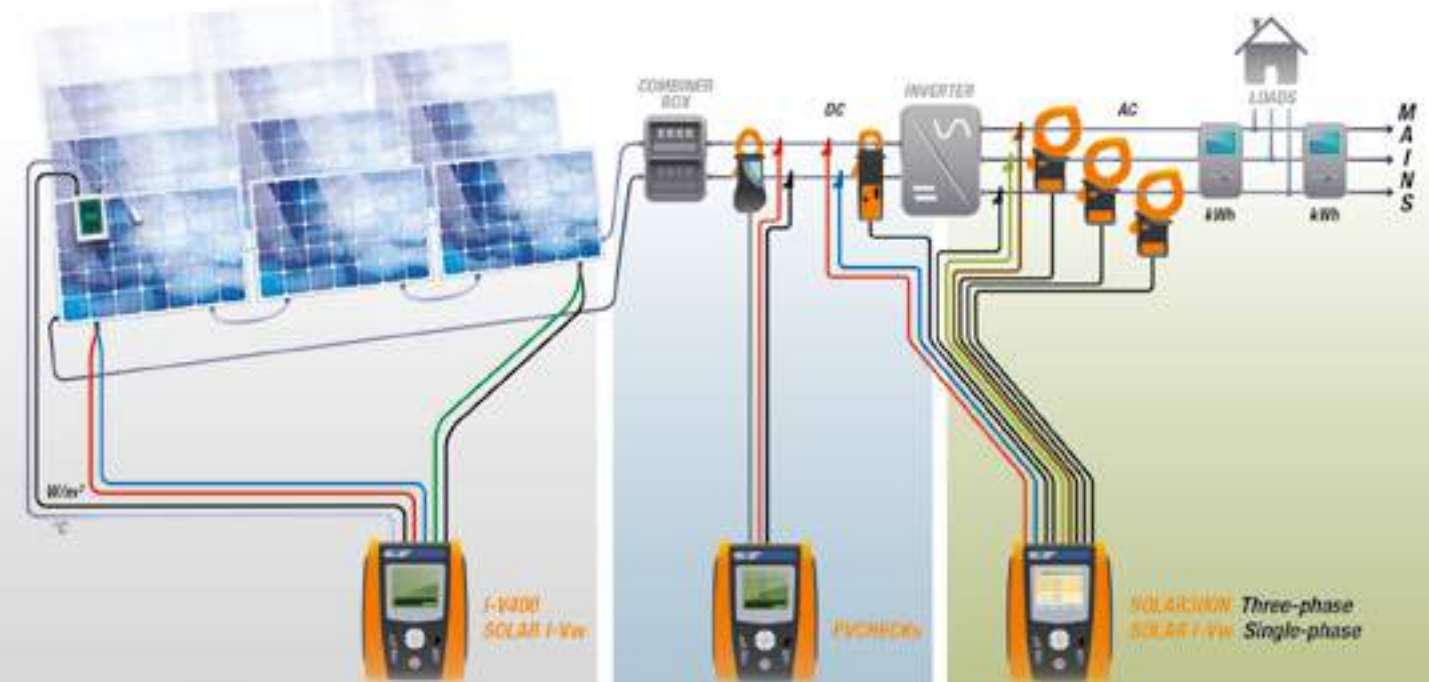

Troubleshooting

Commissioning Tests

Performance

COMPARISON TABLE FUNCTIONS



MAINTENANCE AND EFFICIENCY OF THE PHOTOVOLTAIC SYSTEM

	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300
Continuity of protective conductors with 200mA	-	-	-	•	-
Insulation measurement with test voltage 250, 500, 1000VDC with no service interruption	-	-	-	•	-
I-V Curve measurement on single module or string	•	•	-	-	-
VOC and ISC measurement on single module or string	•	•	-	•	-
Single-Phase and Three-Phase efficiency measurement	• 1MPPT (3MPPT with MPP300)	-	• 1MPPT (3MPPT with MPP300)	-	•
DC side efficiency of the photovoltaic field	-	-	•	•	-
Use of remote unit SOLAR-02 with USB \ RF connection	• RF	• RF	• USB	• RF	• RF • USB
Measurement of irradiation with reference cell	•	•	•	•	-
Temperature measurement of cell and environment	•	•	•	•	-

POWER QUALITY ANALYSIS

AC/DC voltage in single-phase/three-phase systems	-	-	•	• DC	•
AC/DC current in single-phase/three-phase systems	-	-	•	• DC	•
Cosphi, Power Factor	-	-	•	-	-
Voltage unbalance (NEG%, ZERO%)	-	-	•	-	-
Power/Energy: Active P, Reactive Q, Apparent S	• only active P	-	•	• only active P	-
Voltage and current harmonics up to the 49th with THD%	-	-	•	-	-
Voltage anomalies (dips, peaks) with 10ms resolution (@ 50Hz)	-	-	•	-	-
Voltage fast transients (spikes) with 5µs resolution (200kHz)	-	-	•	-	-
Electric motor starting current (INRUSH)	-	-	•	-	-
Voltage flickers (Pst, Plt)	-	-	•	-	-
Full analysis according to EN50160	-	-	•	-	-
Phase sequence	-	-	•	-	-
Neutral-Ground Voltage	-	-	•	-	-
Neutral current	-	-	•	-	-

MEMORY AND RECORDING

Max number of simultaneously selectable parameters	9	-	251	5	-
Recording with selectable integration period	5s-60m	-	1s-60m	5s-60m	1s-60m
Indicative memory duration (in days @ PI=10min @ max number of parameters)	8	-	90	-	8
Indication of recording duration for power quality analysis	-	-	•	-	-
Internal memory extension with Compact Flash card	-	-	•	-	-



> FOLLOWS

Default and custom recordings	-	-	•	-	-
-------------------------------	---	---	---	---	---

REAL-TIME DISPLAY

Summary table of main electric parameters	•	•	•	•	-
Voltage/current waveforms	-	-	•	-	-
Tables or histograms of Harmonics and THD%	-	-	•	-	-
Voltage/current vector diagram	-	-	•	-	-

ADDITIONAL CHARACTERISTICS

Measuring range of I-V Curve / IVCK	1000V / 15A	1000V / 15A	-	1000V / 15A only VOC and ISC	-
Measuring range for efficiency measurement	1000VDC / 265VAC	-	1000VAC-DC 3000A	-	1000VDC / 600VAC 3000AC / 1000ADC
Measurement category:	CAT III 300V	CAT III 300V	CAT IV 600V	CAT III 300V	CAT IV 300V
Touchscreen colour display	-	-	•	-	-
LCD display with backlight	•	•	-	•	-
Internal memory capacity	200 curves I-V 8 days@ PI=10 min	200 curves I-V	15MB 90 days@ PI 10min	999 Locations	2MB 8 days@ PI=10 min
USB port for data download onto Pen Drive	-	-	•	-	-
PC interface with software for Windows	•	•	•	•	-
Integrated WiFi interface	•	•	-	-	-
Custom management of internal PV module database	•	•	-	•	-
Power supply with rechargeable battery and battery charger	-	-	•	-	•
Auto power off	•	•	•	•	•
Indication of recording duration for efficiency measurement	•	-	•	-	-
Reference standard for Power Quality Analysis	-	-	EN50160	-	-
Help on line on the display	•	•	•	•	-
Size (LxWxH) (mm)	235x165x75	235x165x75	235x165x75	235x165x75	300x265x214
Weight in kg (batteries included)	1.2	1.2	1	1.2	2.3
Reference standard for safety	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1
Order Code	HV000IVW	HV00400W	HV00300N	HV00PVCS	HVMPP300

ORDER CODE HV00300N


SOLAR300N

MULTIFUNCTION DEVICE FOR VERIFICATION OF SINGLE-PHASE AND THREE-PHASE PV SYSTEM EFFICIENCY AND POWER QUALITY ANALYSIS IN COMPLIANCE WITH STANDARD EN50160

- New **touchscreen interface**
- Verification of the **efficiency** of the photovoltaic system
- **Analysis of power quality** and **energy consumption**

SOLAR300N tests **single-phase and three-phase photovoltaic systems**. For this kind of tests, it is necessary to guarantee **simultaneity** between power measurements carried out at the inverter and irradiation and temperature measurements carried out on the photovoltaic panels.


HT Instruments has introduced a **remote measuring device SOLAR02** which **acquires the values of solar Irradiation [W/m²], panel Temperature [°C] and environmental Temperature [°C]** and transfers them onto SOLAR300N, which inserts them onto the same string of power measurements and then elaborates them with the simultaneity required by the law in force. SOLAR300N is not only a device for testing PV systems, but **also a powerful device for a complete analysis of power quality** according to standard EN50160 (harmonic analysis, voltage anomalies, flickers, unbalance, etc.).

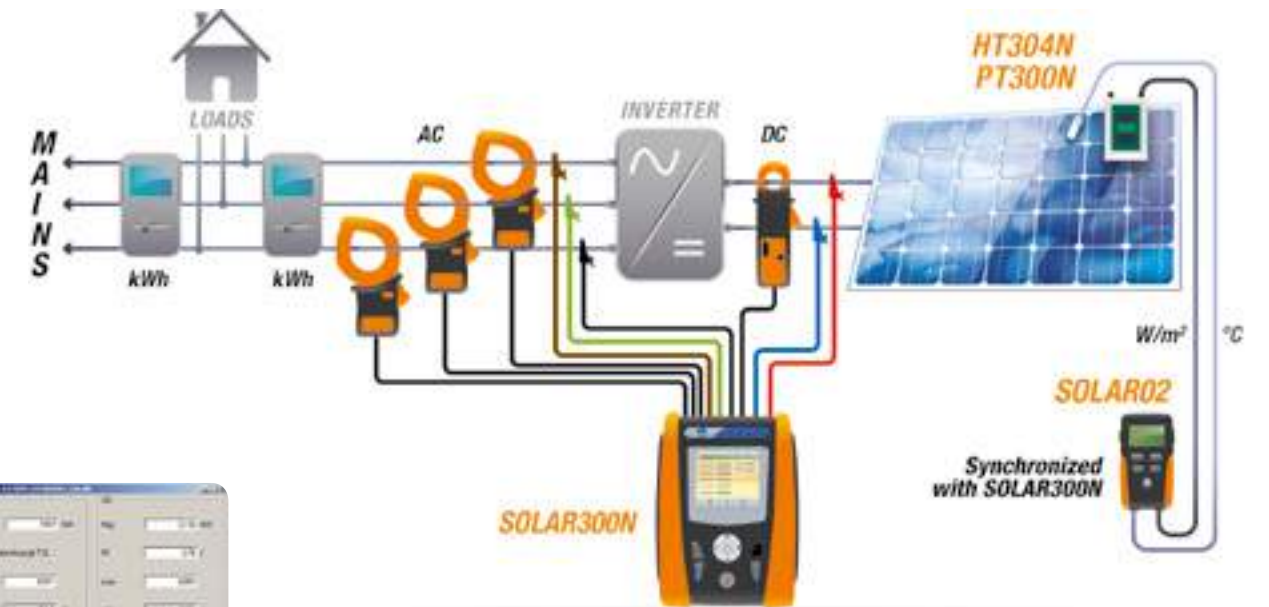

Connection diagram (three-phase system)



Photovoltaic testing result on PC application TOPVIEW.



Photovoltaic testing result.

SOLAR300N IS ALSO AN ANALYZER FOR POWER QUALITY AND ENERGY CONSUMPTION

- Harmonics
- Analysis of recordings
- Measurement of energy consumption
- Flicker
- Voltage anomalies and spikes
- Inrush currents
- Vectors and waveforms

จัดจำหน่ายโดย : บริษัท เฟเวอร์เทค จำกัด
TEL : (02)8702884-5, (02)4289793-5
Email: sales@evertech.co.th
www.evertech.co.th

Functions

Efficiency measurements of the photovoltaic system

- DC/AC TRMS voltage (single-phase and three-phase)
- DC/AC TRMS current (single-phase and three-phase)
- DC/AC active power (single-phase and three-phase)
- Power factor cosφ (single-phase and three-phase)
- Solar irradiation
- Panel and environmental temperature
- Display of testing result (OK/NOT OK)
- Remote unit SOLAR02 for measuring irradiation and temperature
- Periodic recording of power parameters with programmable PI

Analysis of power and energy consumption

- Recording of voltage and current harmonics (up to the 49th)
- Recording of voltage anomalies (dips, peaks) with resolution 10ms
- Flicker analysis according to EN50160
- Recording of Inrush Currents with resolution 10ms
- Recording of voltage spikes with resolution 5μs
- Complete analysis of power quality according to EN50160
- Touchscreen colour display
- Internal memory and USB output for PC connection
- Power supply with rechargeable Li-ION battery
- Rechargeable internal battery
- Help on line on the display
- Management of USB Pen Drive and compact flash card

Main features

Display:	Colour touchscreen with adjustable brightness
Power supply:	Rechargeable Li-ION, 3.7V battery
Internal memory:	15MB (duration 1 month @ IP=15min, 251 parameters)
External memory:	Compact Flash (CF) card
PC interface:	USB 2.0
Safety:	IEC/EN61010-1
Insulation:	double insulation
Pollution level:	2
Measurement category:	CAT IV 600V (to earth) CAT III 1000V (between inputs)
Unbalance:	IEC/EN61000-4-7
Power quality:	IEC/EN50160
Flicker:	IEC/EN61000-4-15
Reference standard and class:	IEC/EN61000-4-30 Class B
Size:	235x165x75mm
Weight (batteries included):	1kg

Accessories provided

SOLAR02	Remote unit for Irradiation and Temperature
KIT800	Set of 5 cables + 5 alligator clips
HT4005K	Standard 200A AC clamp, diameter 40mm (3pcs)
HT4004N	Standard 10-100A DC clamp, diameter 32mm
HT304N	Sensor for irradiation measurement
PT300N	PT1000 probe for PV modules temperature
A0055	External AC/DC battery charger power supply 230V 50/60Hz*
YABAT0003HT1	Rechargeable Li-ION battery
PT400	Touch-screen pen
TOPVIEW2007	Windows software + USB C2007 cable
VA500	Rigid carrying case
	User Manual
	Quick guide
	ISO9000 calibration certificate

(* Please check accessory line to find the correct power adapter for your country)

Optional accessories

MPP300	Accessory for (AC) three-phase efficiency verification up to (3MPPT)
HT4005N	Standard AC 0÷5A, 0÷100A clamp, diameter 20mm
HT96U	Standard 1-100-1000A AC clamp, diameter 54mm
HT97U	Standard 10-100-1000A AC clamp, diameter 54mm
HP30C2	Standard 200-2000A AC clamp, diameter 70mm
HP30C3	Standard 3000A AC clamp, diameter 70mm
HT98U	Standard 1000A DC clamp, diameter 50mm
HP30D1	Standard clamp, diameter 83mm 1000A DC
HTFLEX33E*	Flex 3000A clamp, for power analysis, diameter 174mm
HTFLEX35*	Flex 3000A clamp, for power analysis, diameter 274mm
HT903	3x1-5A/1V box for TA connection
SP-0400	Shoulder strap to use the device with free hands
606-IECN	Magnetic connectors for voltage measurement
A0056	115V/50-60Hz power supply with American plug
CF800	1Gb Compact flash card
MCR800	Compact flash card reader

(* can be used only for power analysis)

COMPARISON TABLE OF ACCESSORIES



	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300	
	TOPVIEW2006 TOPVIEW2007* PC Windows software + USB/optical cable ORDER CODE HA000716 * ORDER CODE HA000714	S TOPVIEW2006	S TOPVIEW2006	S TOPVIEW2007	S TOPVIEW2006	-
	PT300N PT1000 probe for PV module temperature ORDER CODE HA00300N	S	O	S	O	-
	SOLAR02 Remote unit for Irradiation and Temperature ORDER CODE HA000120	S	O	S	O	-
	KITGSC4 Set of 4 cables + 4 alligator clips ORDER CODE HA000021	S	S	-	S	-
	KITPVMC3 - KITPCMC3* Set of 2 adapters with connectors MC3 ORDER CODE HA000032 * ORDER CODE HA000757	S KITPVMC3	S KITPVMC3	-	S KITPCMC3	-
	KITPVMC4 - KITPCMC4* Set of 2 adapters with connectors MC4 ORDER CODE HA000034 * ORDER CODE HA000758	S KITPVMC4	S KITPVMC4	-	S KITPCMC4	-
	KIT800 Set of 5 cables + 5 alligator clips ORDER CODE HA008000	-	-	S	-	-
	KITMPPACC Set of 4 alligator clips for AC voltage ORDER CODE HA000752	-	-	-	-	S
	KITMPPACW Set of 4 cables for AC voltage 2m ORDER CODE HA000753	-	-	-	-	S
	KITMPPDCC Set of 2 alligator clips for DC voltage ORDER CODE HA000754	-	-	-	-	S
	KITMPPDCW Set of 2 alligator clips for DC voltage ORDER CODE HA000755	-	-	-	-	S
	A0055 External power supply AC/DC battery charger 230V 50/60Hz** ORDER CODE HA005500	-	-	S	-	S













S = Standard O = Optional

*Adapter ACON3F4M necessary

**Please check accessory line to find the correct power adapter for your country



» FOLLOWS

	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKs	MPP300	
	PT400 Touch-screen pen ORDER CODE HA0PT400	-	-	S	-	-
	HT304N Sensor for irradiation measurement ORDER CODE HA0304N0	S	S	S	O	-
	M304 Mechanical inclinometer ORDER CODE HA000026	S	S	-	O	-
	HT4004N Standard 10-100A DC clamp, diameter 32 mm ORDER CODE HP04004N	S	-	S	-	O*
	HT4005K Standard 200A AC clamp, diameter 40 mm ORDER CODE HP04005K	S	-	S	-	O
	C2007 USB cable ORDER CODE HA002007	-	-	S	-	S
	BORSA2051 Soft carrying bag ORDER CODE HA002051	-	-	-	S	S
	SP-0400 Shoulder strap to use the device with free hands ORDER CODE HA000112	O	O	O	O	-
	KITPVEXT25M Green and black cable extension, length 25m ORDER CODE HA000129	O	O	-	O	-
	VA500 Rigid Carrying case ORDER CODE HA050000	S	S	S	-	-
	MPP300 Accessory for measuring and recording the efficiency of a single- and three-phase single- and multi-string photovoltaic system (up to three MPPT) ORDER CODE HVMPP300	O	-	O	-	-
	HT96U Standard clamp 1-100-1000A AC, diameter 54 mm ORDER CODE HP00096U	O	-	O	-	O

S = Standard O = Optional

*Adapter ACON3F4M necessary

COMPARISON TABLE OF ACCESSORIES

> FOLLOWS



	SOLAR I-Vw	I-V400w	SOLAR300N	PVCHECKS	MPP300
HT97U Standard clamp 10-100-1000A AC, diameter 54 mm ORDER CODE <i>HP000972</i>	0	-	0	-	0
HT98U Standard 1000A DC clamp, diameter 50 mm ORDER CODE <i>HP00098U</i>	0	-	0	-	0*
HTFLEX33E Flex 3000A AC clamp, diameter 174mm ORDER CODE <i>HP00033E</i>	-	-	0	-	0
HP30D1 Standard 1000A DC clamp, diameter 83 mm ORDER CODE <i>HP0030D1</i>	0	-	0	-	0*
HP30C3 Standard 3000A AC clamp, diameter 70 mm ORDER CODE <i>HP003003</i>	-	-	0	-	0
HP30C2 Standard 200-2000A AC clamp, diameter 70 mm ORDER CODE <i>HP003002</i>	-	-	0	-	0
HT4004P Standard 10-100 ADC clamp, diameter 32 mm ORDER CODE <i>HP04004P</i>	-	-	-	-	0
HT4004 Standard 10-100A DC clamp, diameter 30 mm ORDER CODE <i>HP004004</i>	-	-	-	S	-
HT903 3x1 - 5A/1V box for TA connection ORDER CODE <i>HA019030</i>	-	-	0	-	-
606-IECN Magnetic connectors for voltage measurement ORDER CODE <i>HA006060</i>	0	-	0	0	0
ACON3F4M Adapter for the connection of clamps HT4004N, HP30D1 and HT98U to MPP300 ORDER CODE <i>HA00ACON</i>	-	-	-	-	S 3 pieces

S = Standard 0 = Optional *Adapter ACON3F4M necessary



ORDER CODE *HA000406*
ANALYSIS TAB
 7.85" IPS Touchscreen, Quad Core, Dual SIM 3G

HT introduces the new tablet with pre-installed HTAnalysis App to immediately start working, right from the first time.

WITH **ANALYSIS TAB** you will:

- Work in a quicker way
- Work in a more collaborative way
- Reduce the amount of paper documents
- Work more safely, protected from any danger of direct contact
- Through HTCLOUD you will be able to share all measurements with your colleagues and/or download them from the PC without physically connecting the device to the PC

CHARACTERISTICS **TABLET**

CPU: MT8382 Cortex A7 Quad Core 1.2Ghz
 GPU: Mali-400 MP2 Graphic Processor
 RAM: 1GB DDR3
 Cell network: Dual SIM 3G
 Internal memory: NAND FLASH 8 GB
 External memory: MicroSD Slot
 Display: 7.85" LCD 1024 x768 (4:3)
 OS: Android 4.4 OS
 Display: Capacitive touchscreen
 Photo camera: 0.3MP (front), 2.0MP (back)

COMPATIBLE DEVICES
MacroTestG3, G2, G1
CombiG2
PQA820, PQA819
HT9022

